




TURBO 250 Motoriduttore elettromeccanico irreversibile per cancelli scorrevoli fino a 2500 kg.

Electromechanical irreversible gear motor for sliding gates up to 2500 kgs.

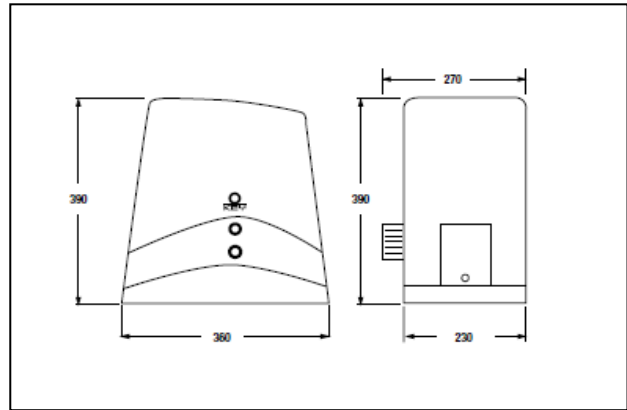

CARATTERISTICHE TECNICHE TECHNICAL DATA

	900SC-200CS	900SC-240	900SC-204CS	900SC-244
centralina control unit	CT-101	(900CT-380)*	CT-101	(900CT-380)*
alimentazione power	230 Vac	400 Vac	230 Vac	400 Vac
potenza assorbita rated absorbed power	580 W	650 W	580 W	650 W
assorbimento motore motor absorption	4 A	1,5 A	4 A	1,5 A
condensatore condenser	35 µF	-	35 µF	-
grado di protezione protection degree	44 IP	44 IP	44 IP	44 IP
coppia couple	57 Nm	63 Nm	57 Nm	63 Nm
velocità speed	0,175 m/s	0,175 m/s	0,175 m/s	0,175 m/s
forza di spinta thrust force	1300 N	1450 N	1300 N	1450 N
peso max cancello max gate weight	2500 Kg	2500 Kg	2500 Kg	2500 Kg
termoprotezione thermoprotection	150 °C	150°C	150°C	-
classe di isolamento insulation class	1	F	1	F
servizio temporaneo temporary service	40 %	50 %	40 %	50 %
temperatura di esercizio running temperature	-20° +70°C	-20° +70°C	-20° +70°C	-20° +70°C
peso weight	16 Kg	15,5 Kg	16 Kg	15,5 Kg

* Centralina consigliata Suggested control unit

